


Reliable Direct Contact Temperature Sensing


OSENSA's medium voltage fiber optic temperature sensors install on switchgear contacts, bus bars, cast resin transformer, motor, and generator windings to provide reliable 24/7 thermal monitoring with noise-free performance. The probes are constructed from durable, high dielectric strength materials and have been tested to safely operate on equipment rated up to 38 kV AC (22 kV DC). They install quickly and can be ordered with optional probe-tip attachments suitable for various applications.

Probe Specifications


PRB-GB3-02M-ST-L



PRB-GB3-02M-ST-L-TP1

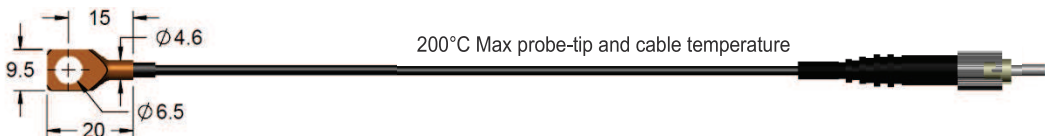


PRB-PF1-02M-ST-L-TP2

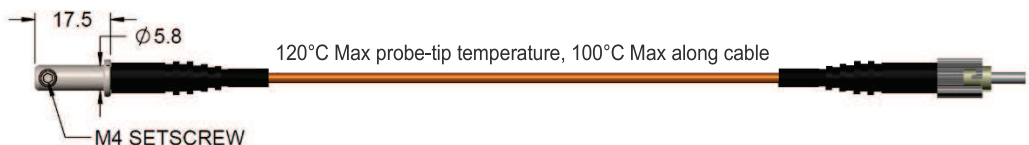

Model #	Maximum Rating	Sensing Range	Accuracy	Jacket	Bend Radius*
PRB-GB3-02M-ST-L	38 KV, 3 Phase	-40 to +200°C	±1.0°C	FEP	8 mm
PRB-PF1-02M-ST-L	38 KV, 3 Phase	-40 to +120°C	±1.0°C	Nylon	15 mm

CONNECTOR RING MOUNTING OPTIONS

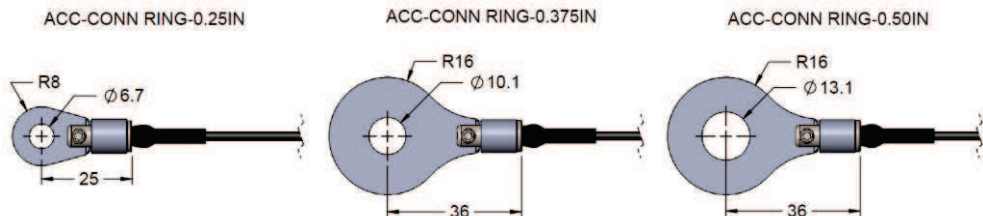

Install in combination with OSENSA's FTX-301-PWR+, FTX-302-PWR+ and FTX-602-PWR+ fiber optic signal conditioners. Probe lengths can be specified from 0.5m to 10m. For additional length, add extension cable EXT-PF1-02M-ST-ST, in lengths from 2.0 to 50m.

* Observe 4x minimum bend radius for permanent installations

TECHNICAL SUPPORT

OSENSA Innovations offers on-site support, commissioning, and training for all of its products. For immediate assistance with any technical issue, please contact support@osensa.com or call 1-888-732-0016.

WARRANTY INFORMATION

OSENSA Innovations stands behind its products and services. All fiber optic temperature probes and signal conditioners ship with a full one year repair or replacement warranty. You may also purchase an extended five year warranty. Some conditions apply.

CUSTOM OEM SOLUTIONS

OSENSA offers cost-effective design and consulting services at discounted rates for high-volume OEM customers. Let the engineering team at OSENSA Innovations help you rapidly develop custom probes for your power monitoring application. OSENSA's team has many years of experience designing fiber optic temperature probes for various industrial environments.

FURTHER INFORMATION

For more information on any of our products or services please visit our website: www.osensa.com or email: info@osensa.com.

Temperature Transmitters

Please consult the table below to ensure you are ordering the correct transmitter for the probe style you desire. Also note that only the -LUX+ and -XFMR+ series can be ordered as 1, 2 or 3 channel devices. For instance, an FTX-100-LUX+ is a single channel device and an FTX-201-XFMR+ is a 2 channel device.

Model #	Fiber Optic Temperature Probe Styles						Extension Cables		
	PF1	GB3	MR1	G40	G20	LUXTRON™	PF1	400	200
FTX-602/302-PWR	✓	✓					✓		
FTX-301-PWR+	✓	✓					✓		
FTX-300-LUX+			✓	✓	✓		✓	✓	✓
FTX-301-XFMR+						✓		✓	✓

TECHNICAL SUPPORT

OSENSA Innovations offers on-site support, commissioning, and training for all of its products. For immediate assistance with any technical issue, please contact support@osensa.com or call 1-888-732-0016.

WARRANTY INFORMATION

OSENSA Innovations stands behind its products and services. All fiber optic temperature probes and signal conditioners ship with a full one year repair or replacement warranty. You may also purchase an extended five year warranty. Some conditions apply.

CUSTOM OEM SOLUTIONS


OSENSA offers cost-effective design and consulting services at discounted rates for high-volume OEM customers. Let the engineering team at OSENSA Innovations help you rapidly develop custom probes for your research application. OSENSA's team has many years of experience designing fiber optic temperature probes for various laboratory environments.

FURTHER INFORMATION

For more information on any of our products or services please visit our website: www.osensa.com or email: info@osensa.com.

Fiber Optic Temperature Probes

PRB-PF1-06M-ST-L-TP2

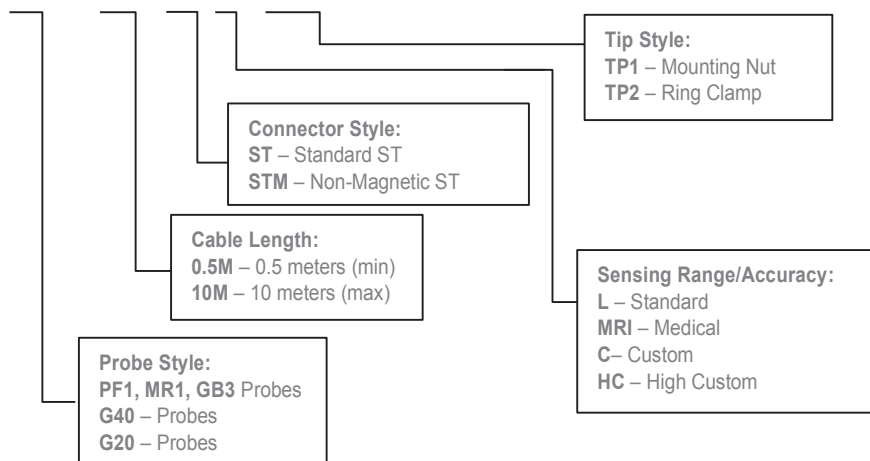

Fiber Optic Extension Cables

EXT-400-10M-STM-STM

